

# CIRCA TABLE

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Table

## LIGHT SOURCE

LED Flat-Panel

## LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

## FEATURES

- 360° shade rotation
- 45° shade tilt in two directions
- USB-A charging port
- Ships flat-packed

## SPECIFICATIONS

- Voltage: 120V or 240V 50-60Hz
- Power Consumption: 8.7W
- Color temperature: 2700K
- Luminosity: 500 Lumens
- Luminaire efficacy: 57 Lumens/Watt
- Color Rendition Index: 90 CRI
- ADA compliant
- Title 20 compliant
- 50K hour lifespan
- Cable length: 8' (244cm)
- Global multi-plug adapter available

## CERTIFICATIONS



## PRODUCT CODES

Circa Table (Graphite):	CIRC TBL GPT
Circa Table (White):	CIRC TBL WHT
Circa Table Grommet (White):	CIRC-GROM-WHT
Circa Table Grommet (Graphite):	CIRC-GROM-GPT

## PACKAGING WEIGHT AND DIMENSIONS

Circa Table :	8.45LBS	15" X 14" X 4"
	3.8KGS	38cm X 36cm X 10cm

## NOTES

Custom requests can be considered on volume orders




## FINISHES




## DIMENSIONS

CIRCA TABLE

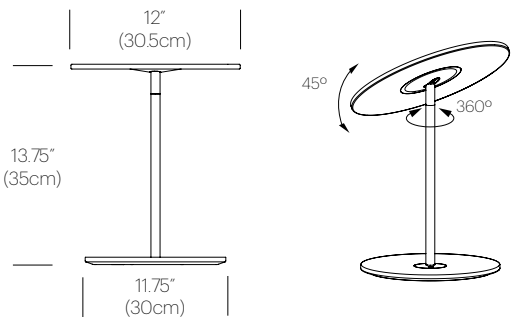

CIRCA GROMMET

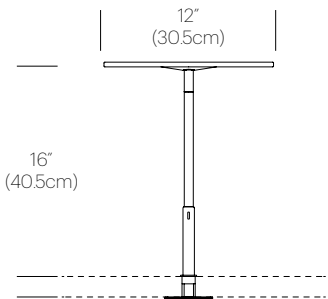

SURFACE MOUNT AVAILABLE FOR  
1.18" (3cm), 2" (5cm) AND 3" (7.5cm)  
WORKSURFACES

# CIRCA FLOOR

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its integrated USB charging port, 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Floor

## LIGHT SOURCE

LED Flat-Panel

## LIGHT CONTROL

Full range dim control 100%-10% (optical switch)

## FEATURES

- 360° shade rotation
- 45° shade tilt in two directions
- USB-A charging port
- Ships flat-packed

## SPECIFICATIONS

- Voltage: 120V or 240V 50-60Hz
- Power Consumption: 11.5W
- Color temperature: 2700K
- Luminosity: 800 Lumens
- Luminaire efficacy: 70 Lumens/Watt
- Color Rendition Index: 90 CRI
- ADA compliant
- Title 20 compliant
- 50K hour lifespan
- Cable length: 8' (244cm)
- Global multi-plug adapter available

## CERTIFICATIONS



## PRODUCT CODES


Circa Floor (Graphite):	CIRC FLR GPT
Circa Floor (White):	CIRC FLR WHT
Circa Floor+Ped. (Graphite):	CIRC FLR PED GPT
Circa Floor+Ped. (White):	CIRC FLR PED WHT

## PACKAGING WEIGHT AND DIMENSIONS

Circa Floor:	21.9LBS	29" X 18" X 3.5"
	9.9KGS	74cm X 46cm X 9cm
Circa Floor Pedestal:	2.85LBS	11" X 11" X 3"
	1.3KGS	28cm X 28cm X 8cm

## NOTES


Custom requests can be considered on volume orders

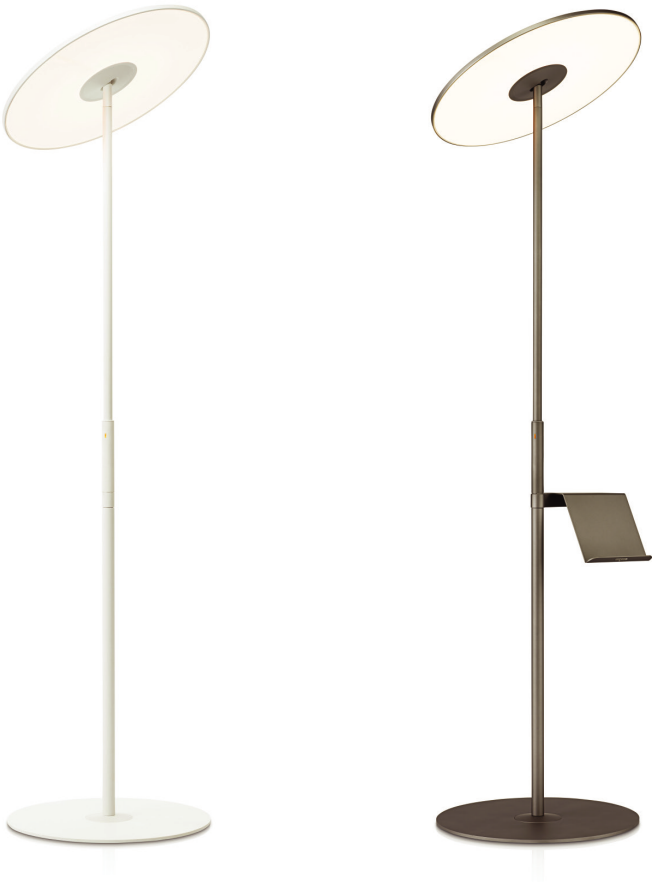

## FINISHES



## DIMENSIONS

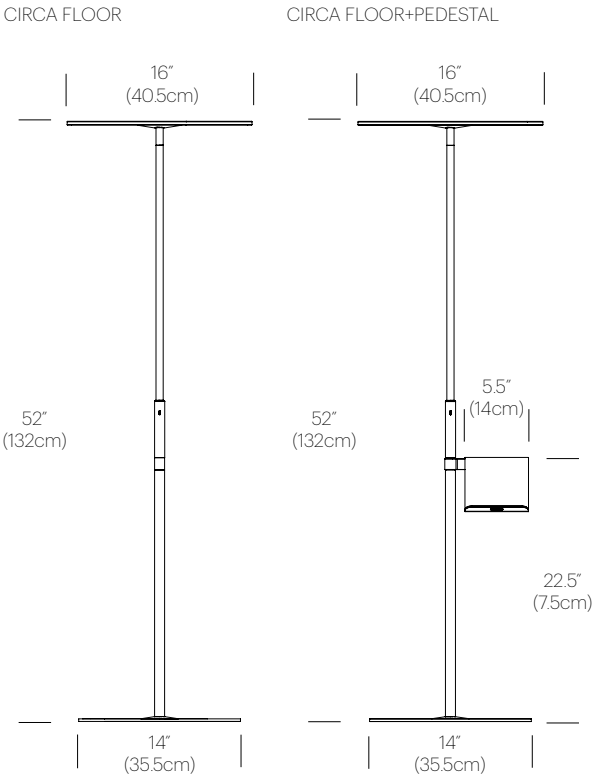

# CIRCA FLUSH

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Wall/Ceiling

## LIGHT SOURCE

LED Flat-Panel

## LIGHT CONTROL

Hard wired, dimmable  
Compatible with TRIAC and ELV dimmers  
0-10V dimming available upon request


## FEATURES

Ships flat-packed

## SPECIFICATIONS

Voltage: 120 or 240V 50/60Hz  
277V 50/60Hz available upon request  
Power Consumption: 10.5W  
Color temperature: 2700K  
Luminosity: 12"(500Lm), 16"(800 Lm)  
Luminaire efficacy: 76 Lumens/Watt  
Color Rendition Index: 90 CRI  
Title 20 compliant  
ADA compliant  
50K hour lifespan

## CERTIFICATIONS

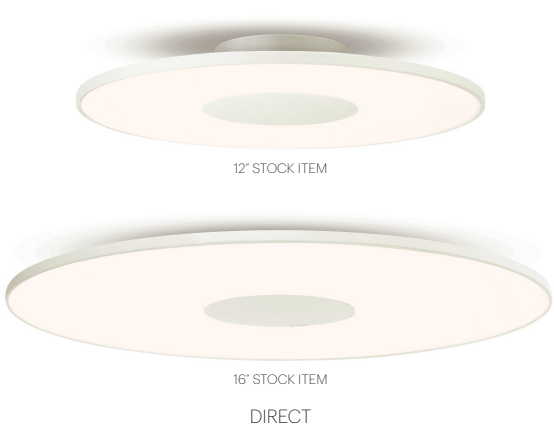


## FINISHES



## DIMENSIONS

CIRCA FLUSH 12

CIRCA FLUSH 16

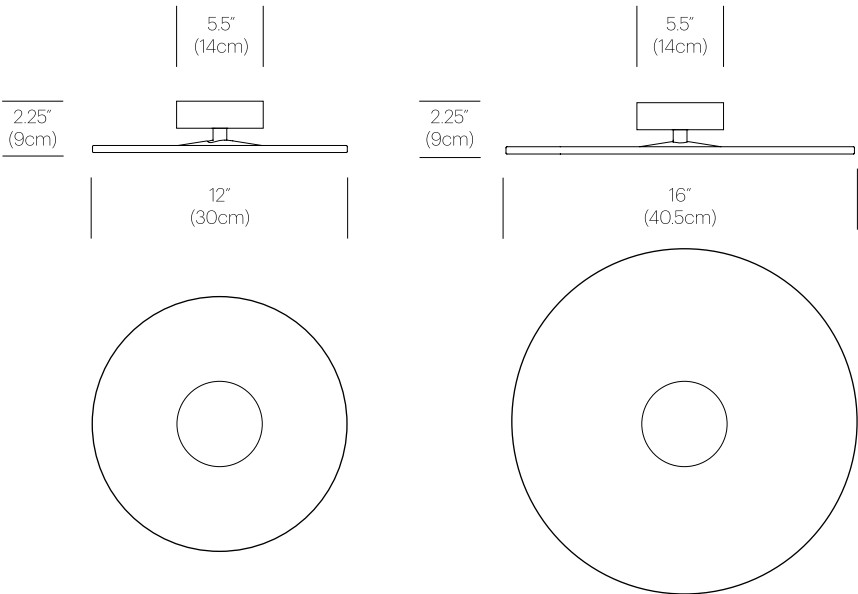

## PRODUCT CODES

Circa Flush Direct 12 Graphite:	Special order only
Circa Flush Direct 12 White:	CIRC FSH 12 WHT
Circa Flush Direct 16 Graphite:	Special order only
Circa Flush Direct 16 White:	CIRC FSH 16 WHT
Circa Flush Indirect 12 Graphite:	Special order only
Circa Flush Indirect 12 White:	Special order only
Circa Flush Indirect 16 Graphite:	Special order only
Circa Flush Indirect 16 White:	Special order only

## PACKAGING WEIGHT AND DIMENSIONS

Circa Flush 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Flush 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

## NOTES

Custom requests can be considered on volume orders

# CIRCA PENDANT

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa is available in a wide range of models to satisfy all residential, office and hospitality applications.

## FIXTURE TYPE

Pendant

## LIGHT SOURCE

LED Flat-Panel

## LIGHT CONTROL

Hard wired, dimmable  
Compatible with TRIAC and ELV dimmers  
0-10V dimming available upon request

## FEATURES

360° shade rotation  
45° shade tilt in two directions  
Ships flat-packed

## SPECIFICATIONS

Voltage: 120 or 240V 50-60Hz  
Power Consumption: 10.5W  
Color temperature: 2700K  
Luminosity: 12"(500Lm), 16"(800 Lm)  
Luminaire efficacy: 76 Lumens/Watt  
Color Rendition Index: 90 CRI  
Title 20 compliant  
50K hour lifespan  
Cable length: 10' (305cm) (Field Cuttable)

## CERTIFICATIONS



## FINISHES



## DIMENSIONS

CIRCA PENDANT 12

CIRCA PENDANT 16

## PRODUCT CODES


Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT

## PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm

## NOTES

Custom requests can be considered on volume orders

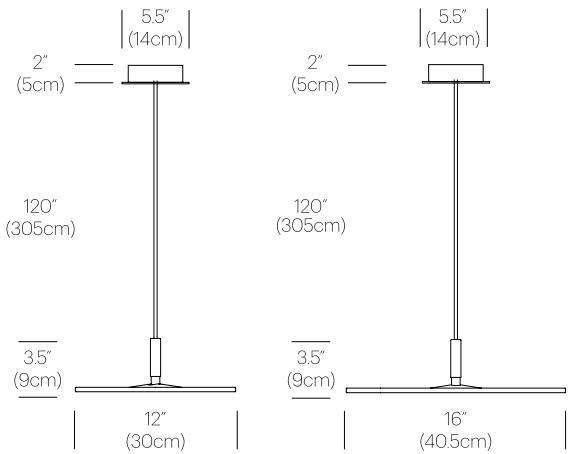

# CIRCA CHANDELIER

## DESCRIPTION

Circa's revolutionary flat-panel LED light source combines seamless movement with warm and balanced illumination. Through its 45° shade tilt and 360° rotation, Circa redefines the ambient lighting category. Circa Chandelier is available in 3, 5, and 7 lamp configurations to fit a wide range of commercial and residential environments.

## FIXTURE TYPE

Pendant

## LIGHT SOURCE

LED Flat-Panel

## LIGHT CONTROL

Hard wired, dimmable

Compatible with TRIAC and ELV dimmers

0-10V dimming available upon request

## FEATURES

360° shade rotation

45° shade tilt in two directions

Ships flat-packed

## SPECIFICATIONS

Voltage: 120 or 240V 50-60Hz

Power Consumption: 10.5W per lamp

Color temperature: 2700K

Luminosity: 12"(500Lm), 16"(800 Lm) per lamp

Luminaire efficacy: 76 Lumens/Watt

Color Rendition Index: 90 CRI

Title 20 compliant

50K hour lifespan

Cable length: 10' (305cm) (Field Cuttable)

## CERTIFICATIONS



## PRODUCT CODES

Circa Pendant 12 Graphite:	CIRC PND 12 GPT
Circa Pendant 12 White:	CIRC PND 12 WHT
Circa Pendant 16 Graphite:	CIRC PND 16 GPT
Circa Pendant 16 White:	CIRC PND 16 WHT
17" Chandelier Canopy:	CHND CAN 17
26" Chandelier Canopy:	CHND CAN 26

## PACKAGING WEIGHT AND DIMENSIONS

Circa Pendant 12:	5.75LBS	15" X 14" X 4"
	2.6KGS	38cm X 36cm X 10cm
Circa Pendant 16 :	9.05LBS	18.5" X 18" X 4"
	4.1KGS	47cm X 46cm X 10cm
Chandelier canopy 17":	15LBS	22" X 22" X 6"
	6.8KGS	56cm X 56cm X 15cm
Chandelier canopy 26":	30LBS	32" X 32" X 6"
	13.6KGS	81cm X 81cm X 15cm

## NOTES

Custom requests can be considered on volume orders

Pablo



## FINISHES

LAMP



WHITE



GRAPHITE

CANOPY



WHITE

## DIMENSIONS

