

ASSEMBLY & INSTALLATION INSTRUCTIONS

TABLE OF CONTENTS

pg.	2-5		PIXO
pg.	6-9	PIXO	WALL PIN-UP
pg.	10-13	.PIXO WALL	HARDWIRED




ASSEMBLY & INSTALLATION INSTRUCTIONS






ASSEMBLY

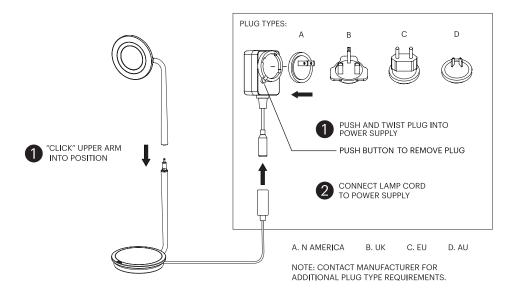


ADJUSTMENT

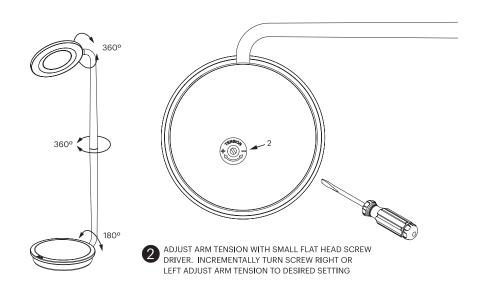



PIXO SWITCH FUNCTION AND USB CHARGING

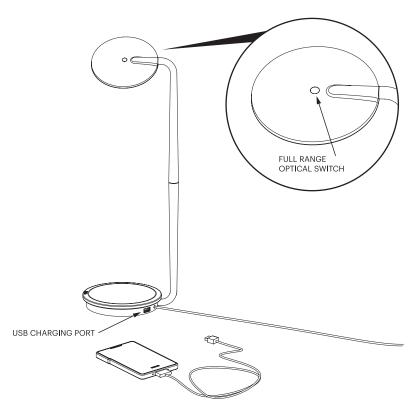

SWITCH FUNCTION

TAP OPTICAL SWITCH BRIEFLY TO CYCLE THROUGH HIGH, LOW AND OFF. PRESS AND HOLD OPTICAL SWITCH TO ACTIVATE FULL RANGE DIM CONTROL. RELEASE FINGER FROM OPTICAL SWITCH WHEN DESIRED LIGHT LEVEL IS REACHED.

USB SPECIFICATIONS

SINGLE 5.0V USB OUTPUT SUPPORTS CHARGING FOR SMARTPHONES, TABLETS AND OTHER MOBILE DEVICES. USB 2.0 OR 1.1 STANDARD CORD REQUIRED (CORD NOT INCLUDED)
OUTPUT VOLTAGE: 5VDC + - 5%
OUTPUT CURRENT: 1A MAX

NOTE

PIXO WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE "OFF" POSITION.

PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN FROM LEAVING YOUR DEVICE PLUGGED IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IT MAY RESULT IN OVER CHARGING.

CARE INSTRUCTIONS

WIPE CLEAN WITH A SOFT DAMP CLOTH. AVOID AMMONIA-BASED CLEANERS.



INFO@PABLODESIGNS.COM 888 MARIN STREET SAN FRANCISCO, CA 94124

PABLODESIGNS.COM





PIN-UP MODEL
ASSEMBLY & INSTALLATION INSTRUCTIONS







Pablo° □ | X | V | A | L |






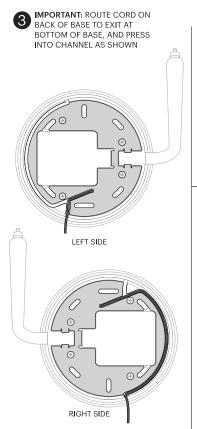



REMOVE COVER PLATE






6 ALIGN FRONT COVER PLATE AND INSERT ONE SIDE, THEN PRESS COVER DOWN UNTIL OTHER SIDE CLICKS INTO PLACE

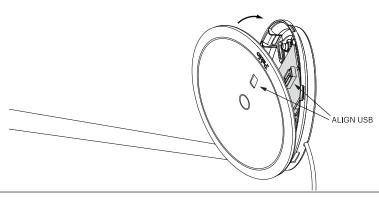

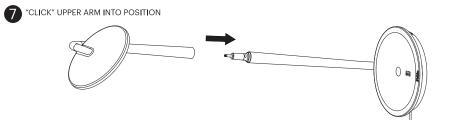

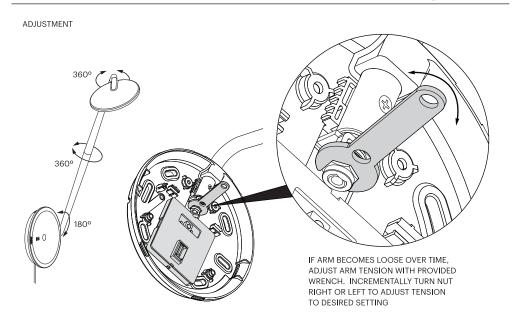


PIXO WALL

CONNECT TO POWER

- 1. SLIDE PLUG INTO POWER SUPPLY
- 2. ALIGN CONNECTOR/POWER SUPPLY LOCKING FEATURES
- 3. INSERT CONNECTOR
- 4. TURN CONNECTOR 90 DEGREES TO LOCK





NOTE: CONTACT MANUFACTURER FOR ADDITIONAL PLUG TYPES

B. UK

D. AU

USB CHARGING PORT

USB CHARGING PORT

SWITCH FUNCTION

C. EU

A. N AMERICA

TAP SWITCH BRIEFLY TO CYCLE THROUGH HIGH, LOW, AND OFF. PRESS AND HOLD TO ACTIVATE FULL RANGE DIM CONTROL. RELEASE FINGER FROM SWITCH WHEN DESIRED LIGHT LEVEL IS REACHED.

HIGHLIGHTS

SINGLE 5.0V USB OUTPUT SUPPORTS CHARGING FOR SMARTPHONES AND OTHER SIMILAR MOBILE DEVICES.

SPECIFICATIONS

USB 2.0 OR 1.1 STANDARD CORD REQUIRED OUTPUT VOLTAGE: 5VDC + - 5% OUTPUT CURRENT: 1A MAX

NOTE

PIXO WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE "OFF" POSITION.

PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN FROM LEAVING YOUR DEVICE PLUGGED IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IT MAY RESULT IN OVER CHARGING.

CARE INSTRUCTIONS

WIPE CLEAN WITH A SOFT DAMP CLOTH. AVOID AMMONIA-BASED CLEANERS.



HARD-WIRED MODEL
ASSEMBLY & INSTALLATION INSTRUCTIONS





 ϵ


Pablo^{*} □ | X | | |


IMPORTANT: WE RECOMMEND FIXTURE BE INSTALLED BY AN ELECTRICIAN

WARNING: FIXTURE MUST BE WIRED CORRECTLY OR RISK DAMAGE TO COMPONENTS






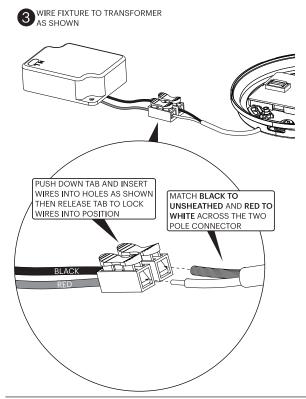






CONNECT BUILDING WIRING TO


INSERT NEUTRAL WIRE UNDER "N" AND LIVE WIRE UNDER "L". TIGHTEN SCREWS WITH A PHILLIPS HEAD SCREWDRIVER





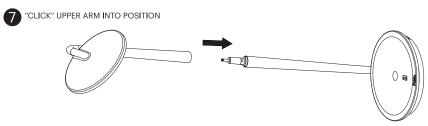

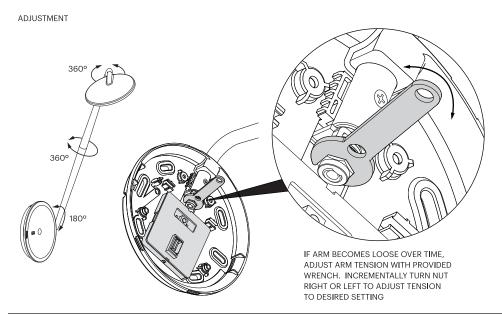

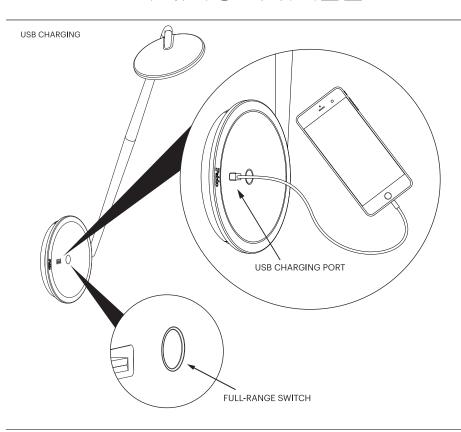

SWITCH FUNCTION

TAP SWITCH BRIEFLY TO CYCLE THROUGH HIGH, LOW, AND OFF. PRESS AND HOLD TO ACTIVATE FULL RANGE DIM CONTROL. RELEASE FINGER FROM SWITCH WHEN DESIRED LIGHT LEVEL IS REACHED.

HIGHLIGHTS

SINGLE 5.0V USB OUTPUT SUPPORTS CHARGING FOR SMARTPHONES AND OTHER SIMILAR MOBILE DEVICES.

SPECIFICATIONS

USB 2.0 OR 1.1 STANDARD CORD REQUIRED OUTPUT VOLTAGE: 5VDC + - 5% OUTPUT CURRENT: 1A MAX

NOTE

PIXO WILL CONTINUE TO CHARGE YOUR MOBILE DEVICE EVEN WHEN LAMP IS IN THE "OFF" POSITION.

PLEASE REFER TO YOUR MOBILE DEVICE'S USER MANUAL FOR COMPATIBILITY AND CHARGING TIME. PLEASE REFRAIN FROM LEAVING YOUR DEVICE PLUGGED IN FOR LONGER THAN THE RECOMMENDED TIME, OTHERWISE IT MAY RESULT IN OVER CHARGING.

CARE INSTRUCTIONS

WIPE CLEAN WITH A SOFT DAMP CLOTH. AVOID AMMONIA-BASED CLEANERS.